


FR Technical Regulations Bulletin


No: FR-TRB-2026-04
Date: August 27, 2026
Subject: Summer Break Updates

Article 26.3.4.a Suspension, Wheels, and Brakes – There is no change to this rule. This language update is to simply clarify this rule and add the diagrams from the vehicle information manual to the rule book. Change this section to read as follows.

- a) The use of the rear suspension pickups points, including the rear shocks, as shown in the [Ligier JS F318 Vehicle Information manual](#) is mandatory. The vehicle information manual and parts list are part of the homologation documentation. Below are the diagrams from the information manual specifying the required mounting locations.

If the mounting holes are damaged, Helicoils, or other types of repair mechanisms, may be used to repair the suspension mounting points in the transmission case.

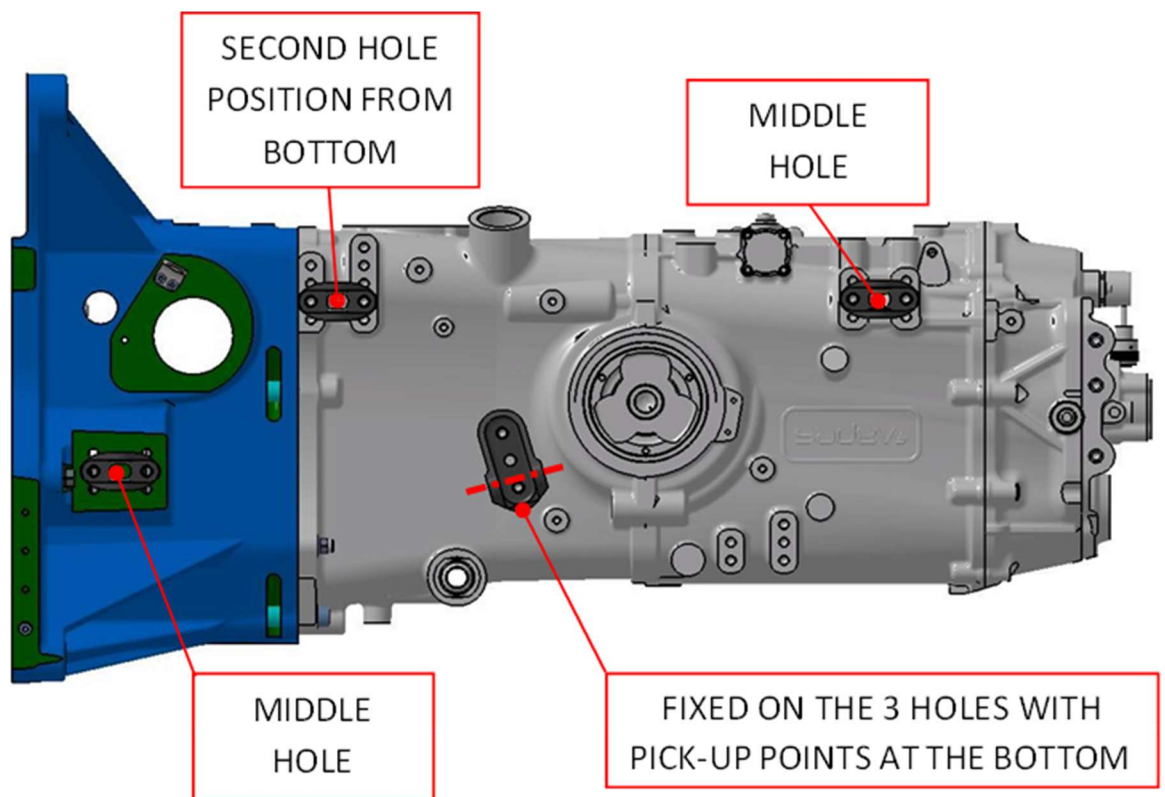

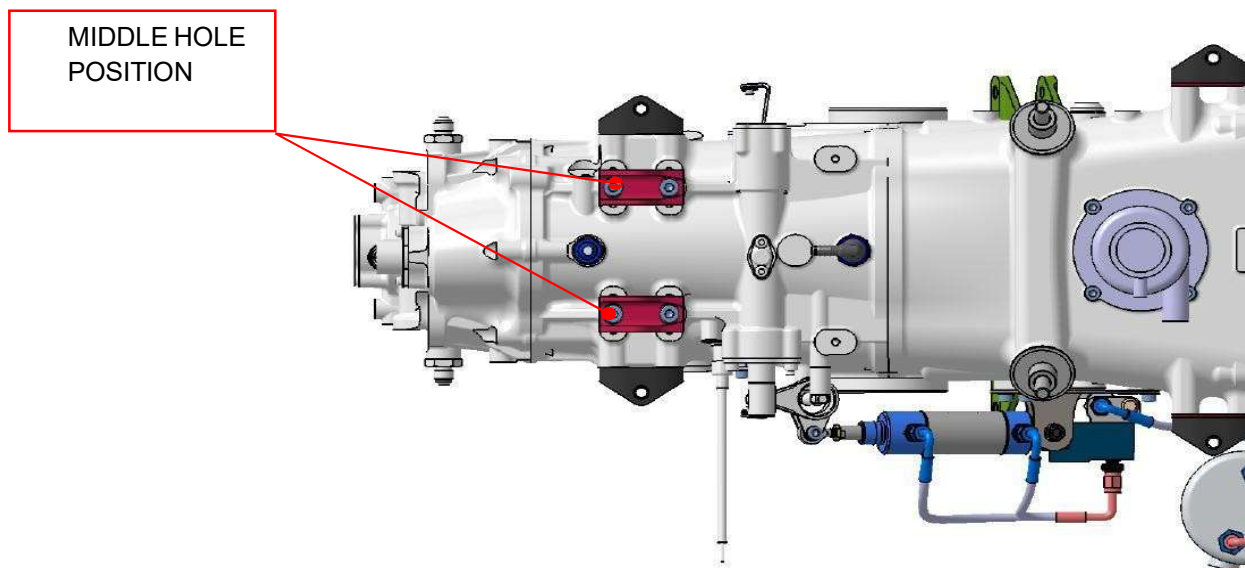

Appendix 9 – TECHNICAL SPECIFICATIONS FOR VEHICLE INSPECTIONS: Correct the following spec line that was added to the appendix in FR-TRB-2026-03. After further investigation it was realized that more than one type of piston seal is available from Ligier.

Required Brake Piston Seals: (as supplied by Ligier)	Black rubber material w/ white dot or orange dot
--	---

Best Regards,

Aaron Coalwell
Formula Regional Americas Technical Director
Email: acoalwell@racingamerica.com (new email address)
Mobile: (770) 367-7950

Mike Atkins
Formula Regional Americas Chief Scrutineer
Email: atkins.3@hotmail.com
Phone: (248) 755-8039