


Pinpoint AM-15

Wall mount for center channel speaker

Assembly and Installation instructions

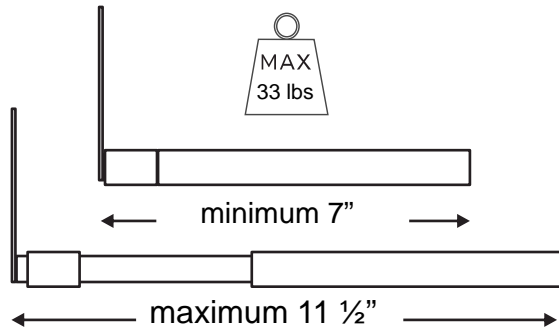

Important: please pay careful attention to where this mount is located. Some walls are not suitable for installation. If you install this mount on dry wall it is highly recommend that the mount to be attached to a stud behind the drywall for maximum weight handling. Drywall anchors are supplied, but it is up to the customer to determine the suitability of the use of the drywall anchors. The overall weight handling can be greatly reduced by the type of drywall and the method of installation. To use the drywall anchor drill a 5/16" diameter hole, fold anchor in middle, insert anchor in hole and tap flush. Pinpoint Mounts, it's Distributors and Dealers are not responsible for damage or injury caused by improper installation. It is recommend that if you are not sure of any of the above instructions, that you have a professional install this bracket. The instructions show installation on block or brick and shows the use of proper anchors, which are not supplied and can be obtained at your local hardware store.

